

Disabling AMT Function in Haswell PC Module (INF7021/INF6521/INF5720)


To meet the requirement for Intel SA 00075 Security Advisory for Active Management Technology the solution is to disable the Intel AMT function inside of the BIOS. There will not be a BIOS update for this PC module.

To disable the AMT functionality in the INF7021/INF6521/INF5720 PC Module follow the steps below:


1. Reboot the PC module with a wired keyboard attached. As soon as the system restarts immediately start pressing the "Delete" key on the keyboard continuously every ½ second until the PC boots into the BIOS menu.

Note: If it boots into Windows reboot and try again

2. Once the PC boots into the BIOS menu right arrow to the "Advanced" tab

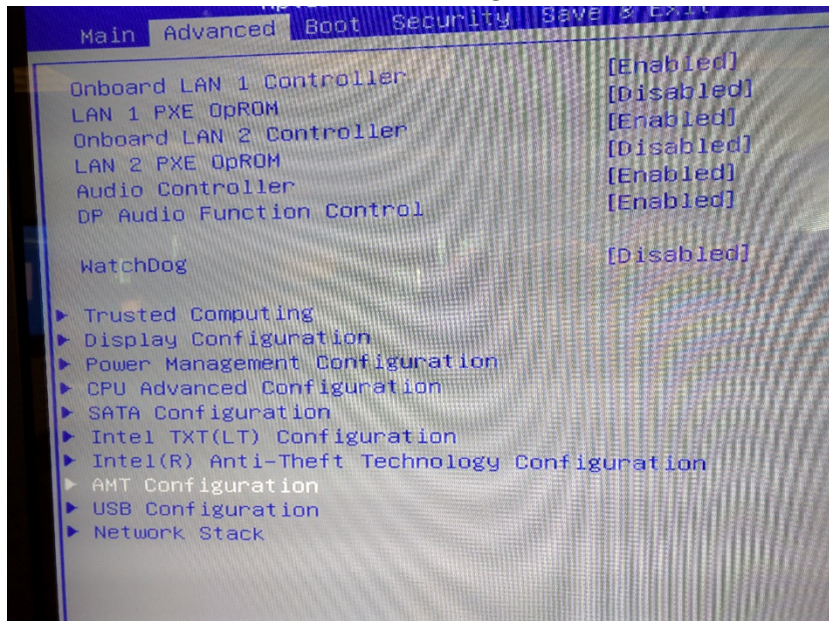

3. Then down arrow to the AMT Configuration option and press the "Enter" key on the keyboard

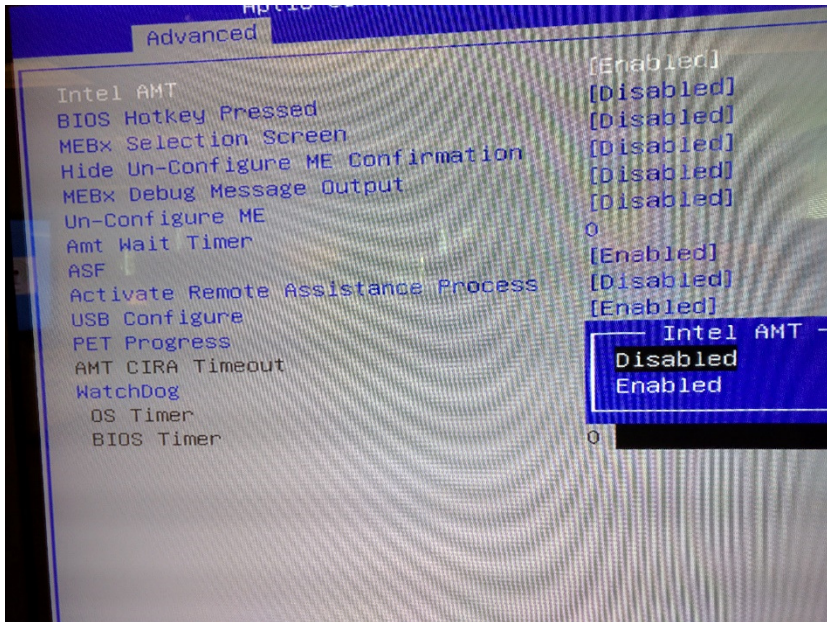

4. With the "Intel AMT" highlighted press enter to select "Disabled"
5. Press "F4" Save & Exit
6. Select "Yes" to save and exit.
7. AMT function is now disabled